


T150Z

thermostatic electric shower



Dimensions given are approximate

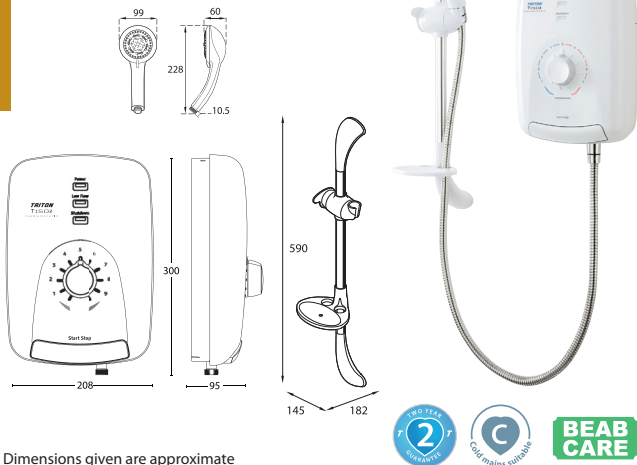

BEAB CARE

Operating Features

- Unique three stage thermostatic performance
- Adjustable timed shutdown
- Adjustable maximum temperature stop
- Provision for a connection to a level access waste pump
- Phased shutdown
- Large push button Start/Stop
- Low pressure indicator
- Stylish riser rail kit
- Double interlocking hose
- Rub clean showerhead - 5 spray pattern

Finish	Power	Code
White/Chrome	8.5 kW	SPSG08WC

Temperature Control	Thermostatic
Power Ratings	8.5 kW
Inlet Connection	15mm compression
Water Entry Points	Top, bottom, back (right hand side unit)
Cable Entry Points	Top, bottom, back (right hand side unit)
Outlet Connection	1/2" BSP
Plumbing System	Mains cold water only
Minimum Running Pressure/Flow	0.5 Bar @ 8 l/min*
Maximum Static Pressure	10 Bar
Surface Mounted Only	
Approvals, Complies with	BEAB, BEAB care, CE, BSI kite mark
Guarantee	2 years

*Recommended minimum running pressure/flow for full performance 1 Bar @ 8 l/min