


# T150Z Pumped thermostatic electric shower

electric showers

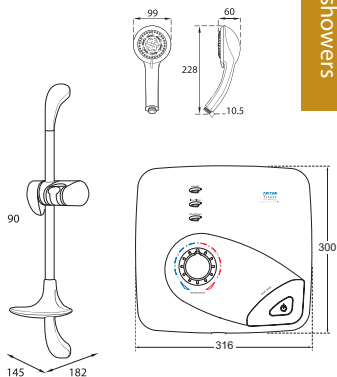

**BEAB CARE**

Dimensions given are approximate

Temperature Control	Thermostatic
Power Ratings	8.5 kW
Inlet Connection	15mm compression
Water Entry Points	Top, bottom, back (right hand side unit)
Cable Entry Points	Top, bottom, back (right hand side unit)
Outlet Connection	1/2" BSP
Plumbing System	Cold water cistern only
Minimum Head Pressure	75mm
Maximum Head Pressure	10m
Surface Mounted Only	
Approvals, Complies with	BEAB, BEAB care, CE, BSI kite mark
Guarantee	2 years

## Operating Features

- Pumped electric for low or negligible water pressures
- Unique three stage thermostatic performance
- Adjustable timed shutdown
- Adjustable maximum temperature stop
- Provision for a connection to a level access waste pump
- Phased shutdown
- Large push button Start/Stop
- Low pressure indicator
- Stylish riser rail kit
- Double interlocking hose
- Rub clean showerhead - 5 spray pattern

Finish	Power	Code
White/Chrome	8.5 kW	SPSGPE08WC